


REV. X

TITLE	SSQ-120-03-G-D
SOCKET STRIP .025 SQ. TAIL	

CURRENT AS OF 01-28-98
PLEASE CONTACT SAMTEC
FOR PRESENT REVISION

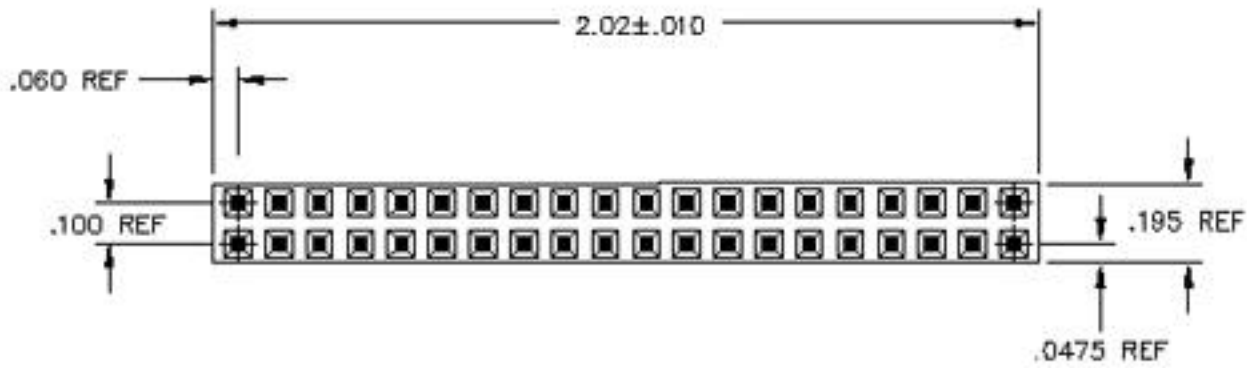


SSQ-120-03-G-D

NO. OF POSITIONS PER ROW -20

CONTACT SPECIFICATION -03

PLATING SPECIFICATION -G: GOLD

BODY SPECIFICATION -D: DOUBLE

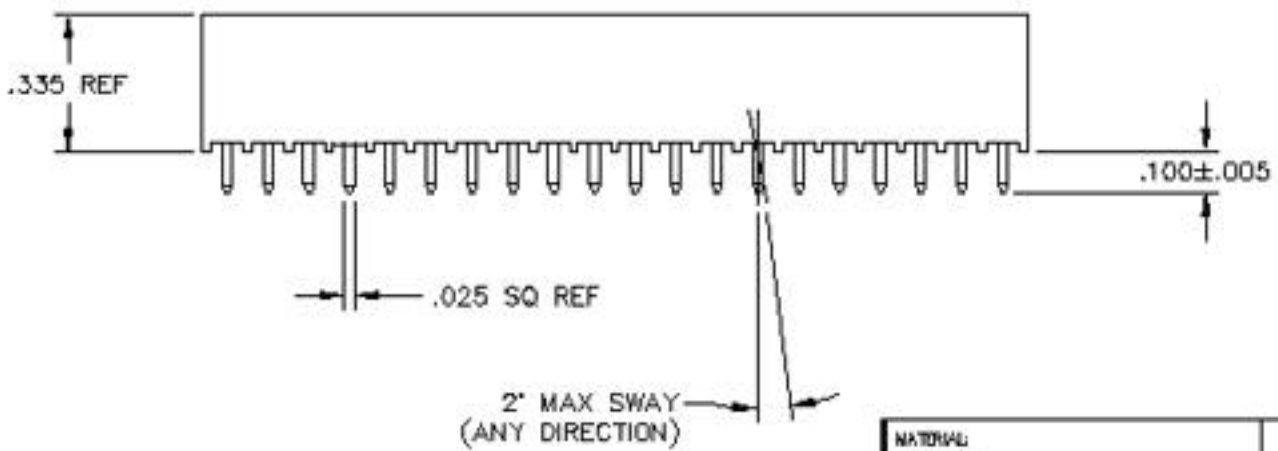

MATERIAL:
INSULATORS:
VALOX 9050-M OR FINITE FR-530
COLOR: BLACK
CONTACT:
PHOSPHOR BRONZE, ALLOY NO. 310 OR 311
PLATING:
.000020 GOLD OVER .000020 NICKEL

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

XXX ± .000

XXX ± .0020

ANGLES ± 2°

DWG/REQD
SSQ120D

samtec

810 PROGRESS BLVD, NEW ALBANY, IN 47150
(812) 944-8723 F.O. BOX 1147 TXN: 810-040-4080

THIS DRAWING HAS BEEN REVIEWED FOR ACCURACY, IF ANY QUESTIONS PLEASE CALL:

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.

- NOTES**
1. CONTACT PUSHOUT FORCE: 1.5 lbs. MIN.
 2. MAX ALLOWABLE BOW: .003 INCH/INCH.
 3. MAX ALLOWABLE SWAY: 2" IN EITHER DIRECTION.
 4. MAX ALLOWABLE VARIATION BETWEEN PIN ROWS: .010
 5. "END WALLS" AFTER CUTTING SHOULD BE .020 ± .003.