Cut Your Development Time !

Nohau EMUL166 and EMUL-ST10 Layout

This is the top view of the target board layout for a direct one to one connectivity to Nohau emulators for the C166 and ST10 families.

support@nohau.com (888) 886-6428 www.nohau.com Campbell, California 95008

Version 2.0
May 2, 2000

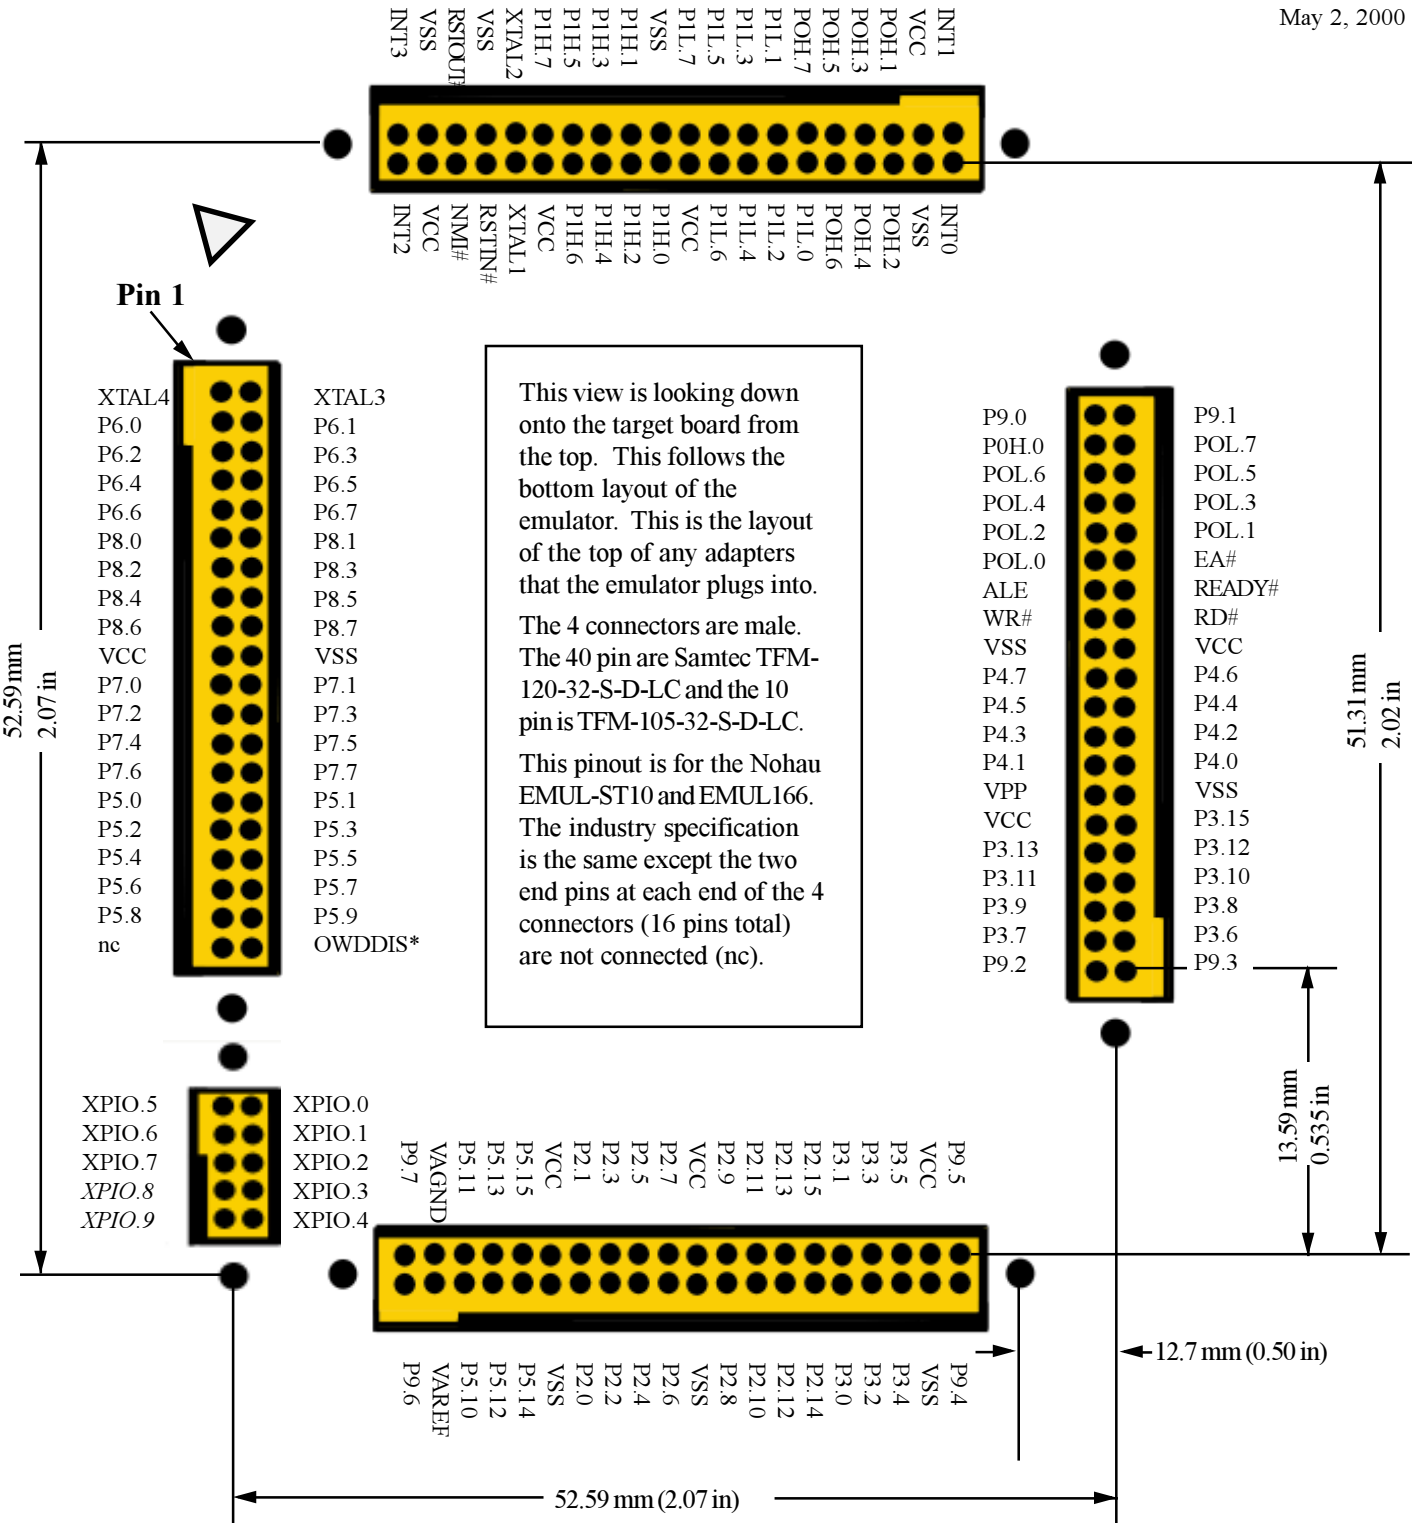

This view is looking down onto the target board from the top. This follows the bottom layout of the emulator. This is the layout of the top of any adapters that the emulator plugs into.

The 4 connectors are male. The 40 pin are Samtec TFM-120-32-S-D-LC and the 10 pin is TFM-105-32-S-D-LC.

This pinout is for the Nohau EMUL-ST10 and EMUL166. The industry specification is the same except the two end pins at each end of the 4 connectors (16 pins total) are not connected (nc).